

MANUFACTURER OF OIL FILTRATION TROLLYS

HYAUDRALIC OIL | TURBINE OIL | LUBRICANTS



Fitted with Vats' Graded Density Absolute Filters

NAS 4 (ISO 15/13/10) Oil Quality

Moisture control with coalescing media

Maintains dissolved moisture to <200 ppm.

Standard trollys for 50 Ltr to 100,000 Ltr tank capacity

Single Media for all Fluids

fluent[®] pro

**High Accuracy
Hydraulic Applications**

Particulate < NAS 4 (ISO 15/13/10)
Dissolved Moisture < 200 ppm

fluent[®] power

**Filtration for
Power Sector**

Particulate < NAS 4 (ISO 15/13/10)
Dissolved Moisture < 200 ppm
Varnish Removal and Control
TAN regulation (Add On)

fluent[®] ultra

**Moderate Hydraulic /
Lubrication Applications**

Particulate < NAS 7 (ISO 17/15/13)
Dissolved Moisture < 500 ppm

fluent[®] plus

OEM Fitments

From 50 Ltr to 100,000 Ltr tank size
NAS 10 to NAS 1
From 1 lpm to 500 lpm

For Mineral, Synthetic, Water Glycol, FRF Fluids, etc.

Glass Fiber Quality Filtration at Substantial Low Cost


Vats Filtration Technologies Pvt. Ltd.
S. No. 78, Shivkamal Ind. Estate, Pune, Maharashtra, 411023 India.
Phone: +91 20 652 61580, 81, 82 Sales: +91 9850843113 Fax: +91 20 25291147
Email: info@vatsfilters.com | www.vatsfilters.com | www.filtrationmasters.in



MANUFACTURER OF GRADED DENSITY DEPTH FILTER

CELLULOSE MELAMINE | ACRYLIC PHENOLIC | CELLULOSE PHENOLIC

(FDA compliant)

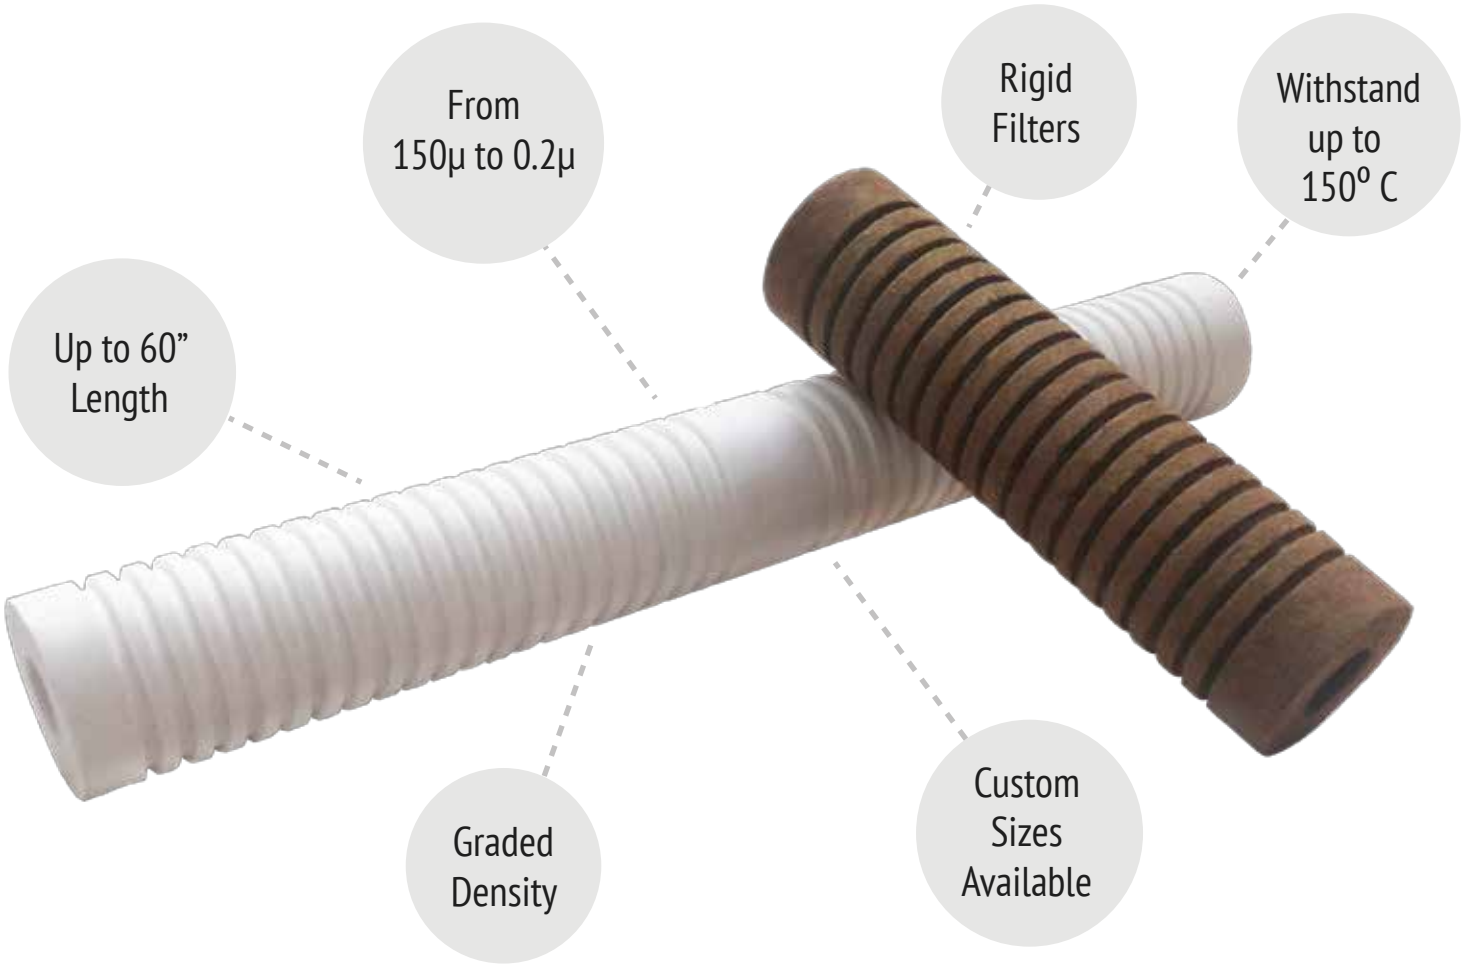

White Labeling Option Available

bonflow[®]
world class eco filtration

17 Years Experience of Filter Manufacturing



The Cost Effective Retrofit Filter

